



New Construction Truckable Tug

PRODUCT DESCRIPTION

"25' 8" X 14 X 5 Draft 3'6" Approx.

Steel - All materials are domestic

Paint - All materials are white blasted with a 3 coat
International Paint System or equivalent

Plating - Deck, sides = ¼ .bottom, bow and stem

5/16" thick. Corners 3/8"

Framing Spacing 0 – 13 = 1'8" & Deck amp; 13 – 15 = 2'

Hydraulic Steering -2 pumps, 5 gpm per engine, 1 driven off each main engine

Stuffing Boxes- PSS shaft seals

Push Knees - extended 6'1" above deck line.

Spot light- 1 (one) 12 volt DC mounted on pilot house

Running lights - Perce Navigation lights 12 volt DC

Bual works- 16" above deck line/ wrapped around

entire haul with 2" flat top

Deck Hatches-1 hatch for each bow and stem void on

deck flush mount

Horn - Fiamm/ Signaltone Airtone stainless steel 12 volt

DC

VHF

GPS-Chart Plotter

Loud Hailer

Propellers 4 bronze work horse style 34" X

18"


Main Engine Propeller shafts - 3 " Aqua Met 17 S/S

Fuse Panels - 1 Bluesea Vertical waterproof fuse panel

12 volt DC

Fuel - 750 gallon capacity tank

Winches -nibrico manual 40 ton capacity

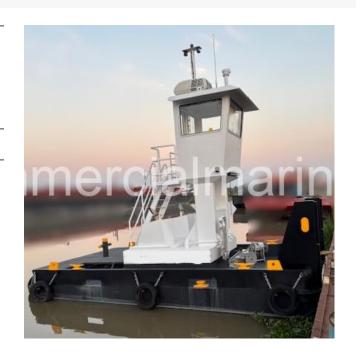





Windows - 100% glass custom fitted with optional tint Throttle controls Cable style mechanical over electrical Engine Room Blowers- 2 Jabsco 250 CFM 12 volt DC Pilot Chair-Garelick Eez- in white deluxe pilot chair Main engines -Cummins 6.7 L 305 HP @2600 rpm Gear Twin disc 2.88: 1 reduction Lube Oil 85 Gal Trim Water 2,040 Gal Hydraulic Oil 85 Gal 2 flanking Rudders SS 3" shafts

Categories: <u>Tugboats</u>

Additional Information One year craftsman warranty. All other warranties for equipment are manufacturer specific.



